


Diese technische Unterlage ist ausschliesslich unser Eigentum. Ohne unsere vorherige Zustimmung darf sie weder vervielfaeltigt noch Dritten zugänglich gemacht werden. Wir behalten uns alle Rechte vor, auch fuer den Fall der Patentierung oder Gebrauchsmustereintragung, Änderungen von Massen oder Abweichungen von freigegebenen Mustern nur mit unserer Zustimmung.

Robert Bosch Car Multimedia GmbH

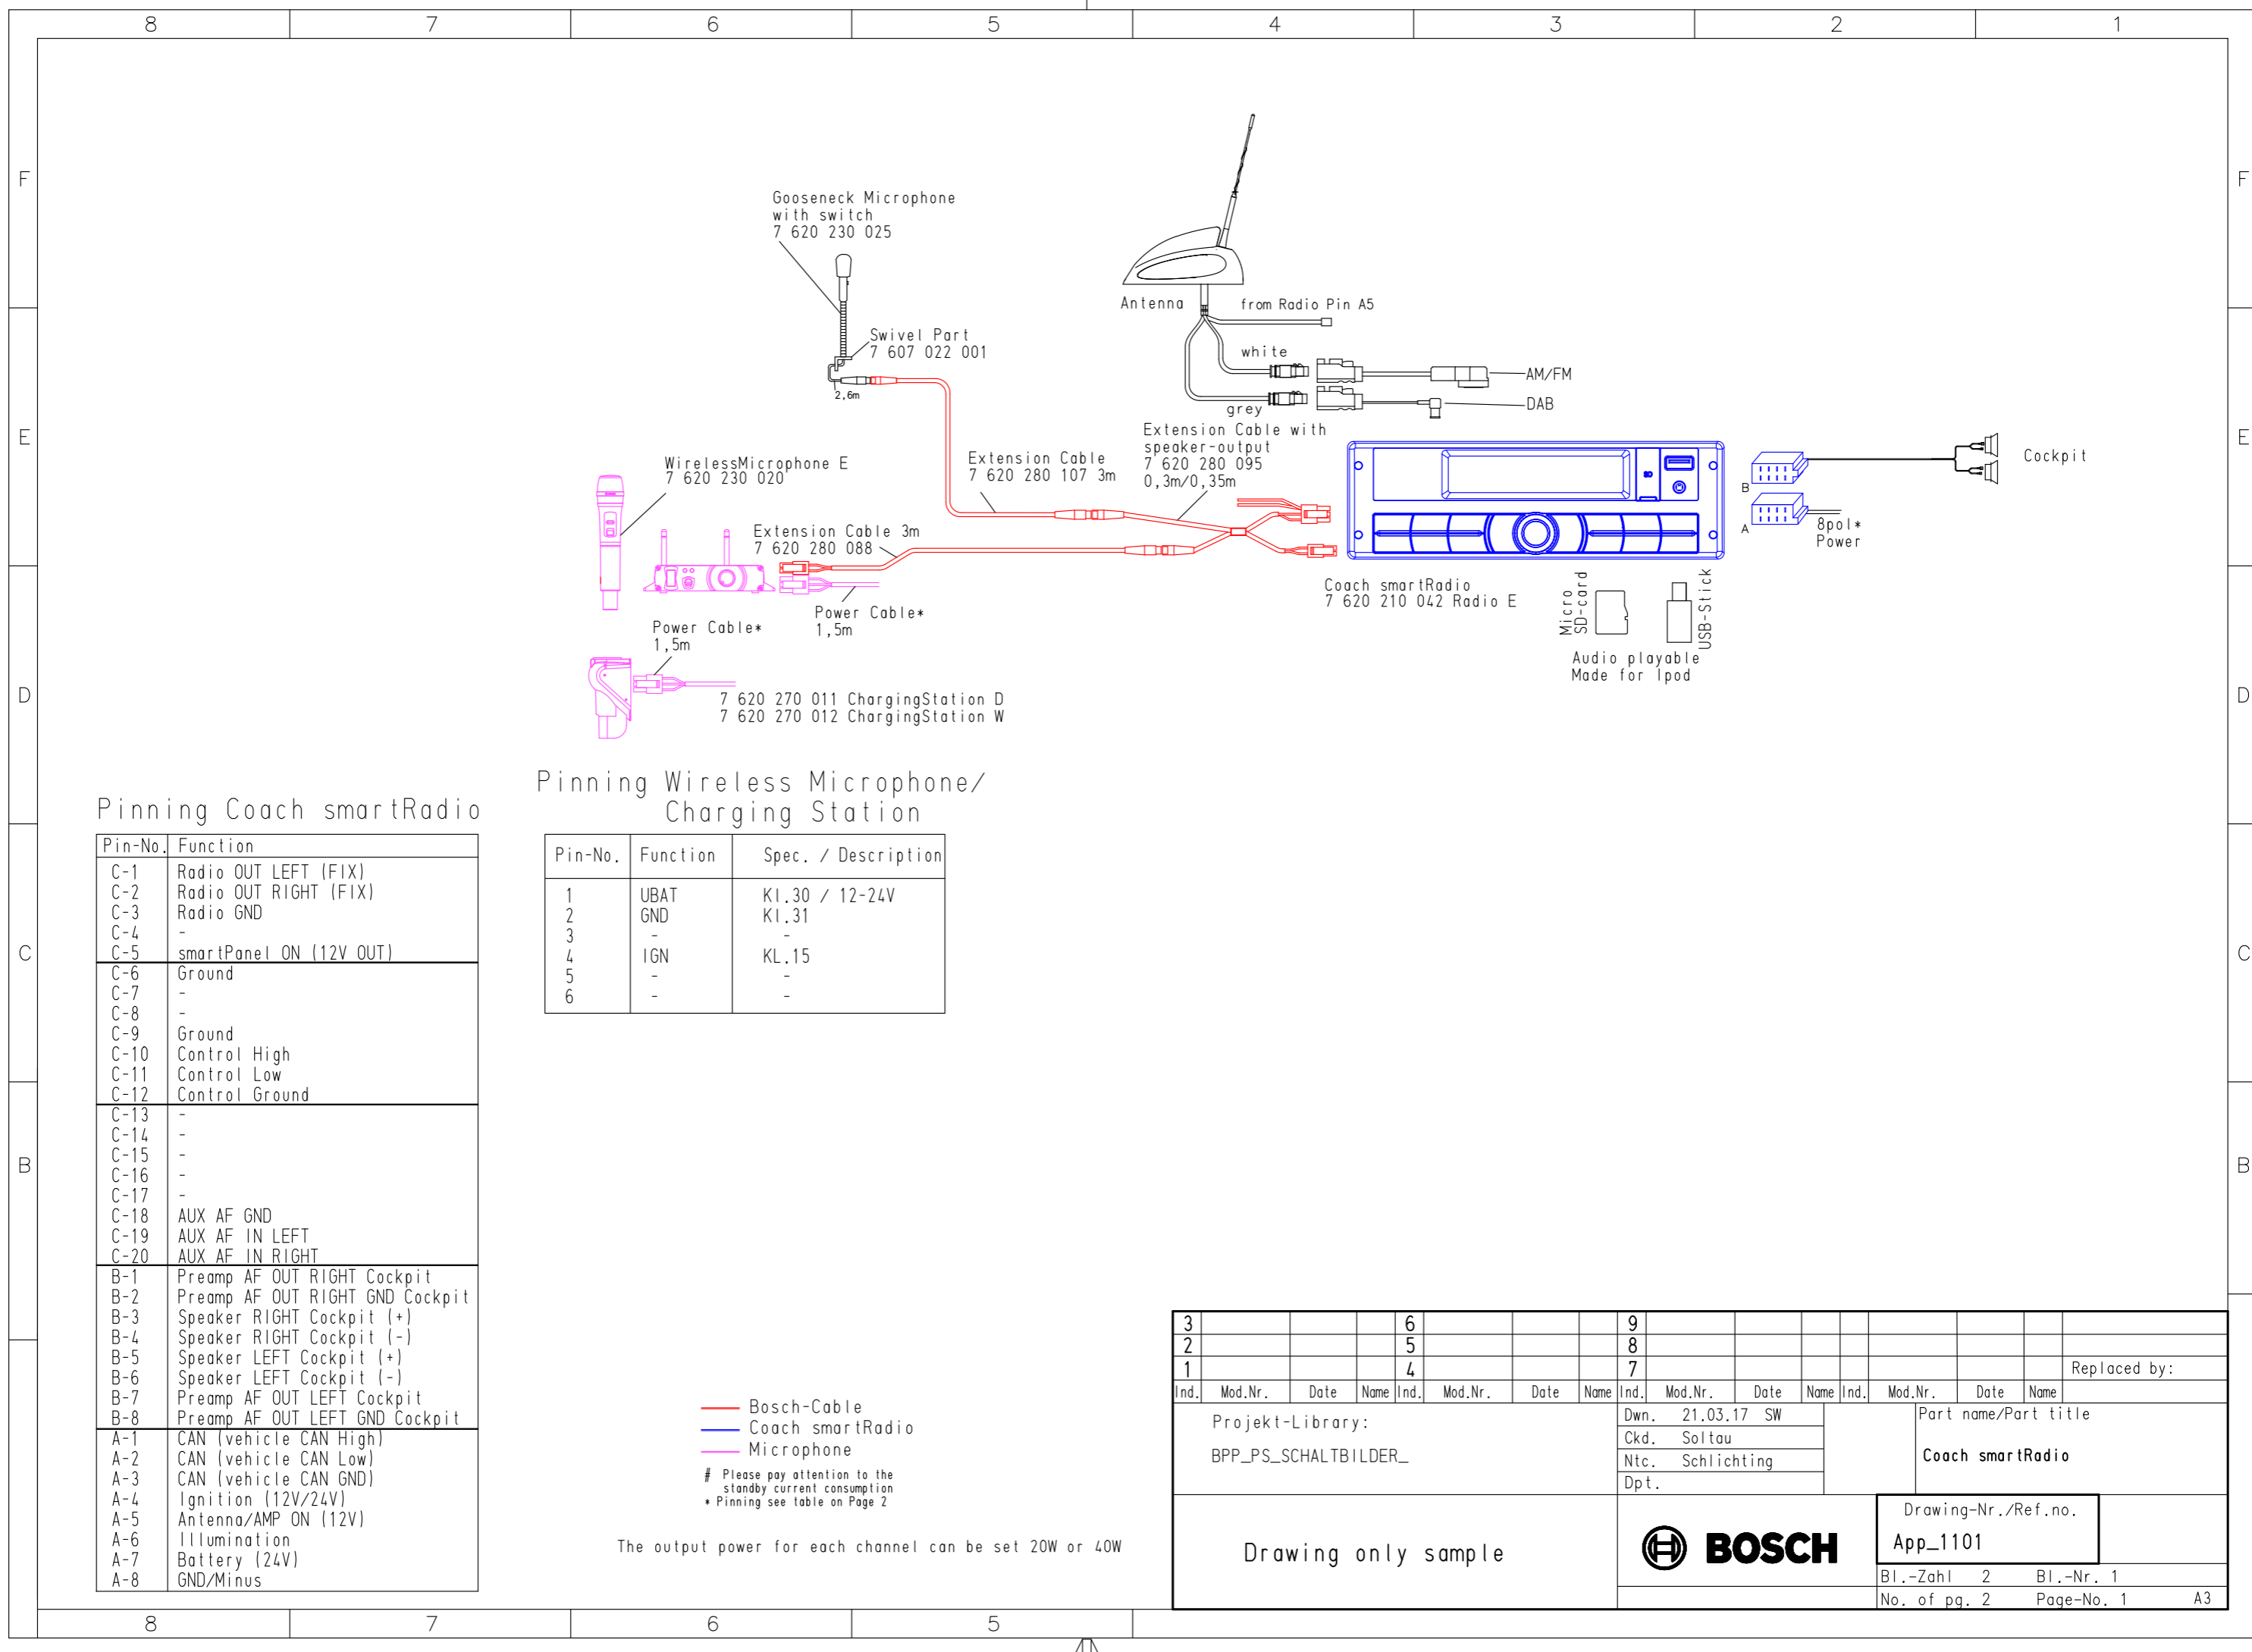

**Pinning Coach smartRadio**

Pin-No.	Function
C-1	Radio OUT LEFT (FIX)
C-2	Radio OUT RIGHT (FIX)
C-3	Radio GND
C-4	-
C-5	smartPanel ON (12V OUT)
C-6	Ground
C-7	-
C-8	-
C-9	Ground
C-10	Control High
C-11	Control Low
C-12	Control Ground
C-13	-
C-14	-
C-15	-
C-16	-
C-17	-
C-18	AUX AF GND
C-19	AUX AF IN LEFT
C-20	AUX AF IN RIGHT
B-1	Preamp AF OUT RIGHT Cockpit
B-2	Preamp AF OUT RIGHT GND Cockpit
B-3	Speaker RIGHT Cockpit (+)
B-4	Speaker RIGHT Cockpit (-)
B-5	Speaker LEFT Cockpit (+)
B-6	Speaker LEFT Cockpit (-)
B-7	Preamp AF OUT LEFT Cockpit
B-8	Preamp AF OUT LEFT GND Cockpit
A-1	CAN (vehicle CAN High)
A-2	CAN (vehicle CAN Low)
A-3	CAN (vehicle CAN GND)
A-4	Ignition (12V/24V)
A-5	Antenna/AMP ON (12V)
A-6	Illumination
A-7	Battery (24V)
A-8	GND/Minus

**Pinning Wireless Microphone/ Charging Station**

Pin-No.	Function	Spec. / Description
1	UBAT	KI.30 / 12-24V
2	GND	KI.31
3	-	-
4	IGN	KL.15
5	-	-
6	-	-

— Bosch-Cable  
 — Coach smartRadio  
 — Microphone  
 # Please pay attention to the standby current consumption  
 \* Pinning see table on Page 2

The output power for each channel can be set 20W or 40W

3				6				9									
2				5				8									
1				4				7									Replaced by:
Ind.	Mod.Nr.	Date	Name	Ind.	Mod.Nr.	Date	Name	Ind.	Mod.Nr.	Date	Name	Ind.	Mod.Nr.	Date	Name		
Projekt-Library: BPP_PS_SCHALTBILDER_								Dwn. 21.03.17 SW Ckd. Soltau Ntc. Schlichting Dpt.				Part name/Part title <b>Coach smartRadio</b>					
Drawing only sample												Drawing-Nr./Ref.no. <b>App_1101</b>					
												Bl.-Zahl 2		Bl.-Nr. 1			
										No. of pg. 2		Page-No. 1		A3			