

## CAR MULTIMEDIA CONTROLLER SAFE DRIVE SDC 2.0



Subject to availability and technical modification.

### Highlights

#### Start of sales

End of 2019

#### Order number

2 010 018 000 032

#### EAN- Code

4 260 499 851 446

- High grade, ergonomic design
- OEM look & feel
- For compatible Blaupunkt car radios with SWC input
- Intuitive operation by own assignment of the keys
- Universally configurable
- Ultra lightweight design
- Battery and 12V electrical system operation, mobile use (if battery installed)
- Installation without drilling wholes, variable mounting options
- Easy installation and connection
- Compact wireless receiver, concealed, requires no visual contact

#### VERTRIEB DURCH:

BLAUPUNKT Competence Center Car Multimedia  
Evo-Sales GmbH, Hastenbecker Weg 33 - 31785 Hameln/Deutschland

# CAR MULTIMEDIA CONTROLLER

## SAFE DRIVE SDC 2.0

2/3

With the Blaupunkt Safe Drive SDC 2.0 you get a universal remote controller for your Blaupunkt car radio.

In the high-grade, black matte design with silver buttons and chrome-plated knob, the controller unobtrusively integrates in your vehicle and lets you operate your radio without having to look away from the road. The controller can be retained for storage or use in the mounting plate, for mobile use, it can be removed with a small turn and used thanks to the integrated battery anytime, anywhere.

Whether you mount the remote controller on the console in your car or motorhome, store it in the glove compartment, place it next to your rest area in the motorhome or have it in front of your motorhome on the table beside you, there are almost no limits.

You can program the key functions simply via the SWC setup of your Blaupunkt car radio, the controller itself does not require any setup.

**Functions:**

Buttons: 4 keys, freely programmable via car radio device  
Knob: two direction rotary encoder with middle button, freely programmable via car radio device  
Illumination: no

**Mounting:**

Plate with 3M adhesive pad for non-destructive assembly or mounting holes for fixation in the desired position  
Beverage cup holder for use in a cup holder


**Connection:**

Battery/ vehicle power: Yes (CR 2032)/ Yes (12 Volts)  
Interface connectors: 12 Volts + SWC (3,5 mm + flying leads)  
Remote control connectors: Wireless radio transmitter, power supply via CR2032, optional power supply via vehicle battery (12 Volts)  
Range: 5- 10 m  
Battery life span: Up to 12 months, depends on usage  
Original OEM- remote control connection: Not supported



## CAR MULTIMEDIA CONTROLLER SAFE DRIVE SDC 2.0

3/3

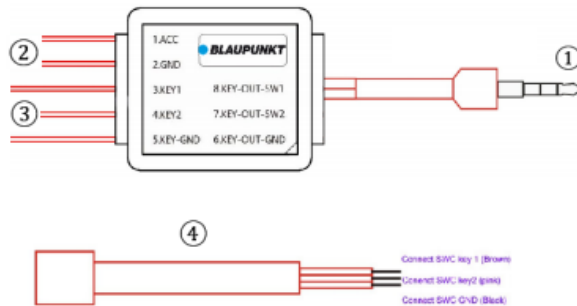

- ① SWC- connector for car radio device (3,5 mm headphone jack)
- ② Power supply connection (1. ACC , 2. GND)
- ③ Inputs (not connected)
- ④ Adaptor for car radio devices without headphone jack



### Compatibility list Blaupunkt car radios:

#### 1-DIN:

Models of the series 230, 270, 370, 420, 440, 470, Heavy Duty, SQR 46 and others

#### 2-DIN:

Models of the series 290, 530, 570, 590, 600, 690, 790, 800, 835, 940, 945, 990 and others

Using the SAFE DRIVE 2.0 requires a compatible car radio. Most current Blaupunkt models as well as other brands with a compatible SWC input will work.

To program the functions, please refer to the instructions of the respective device. The possible functions depend on the car radio used.