
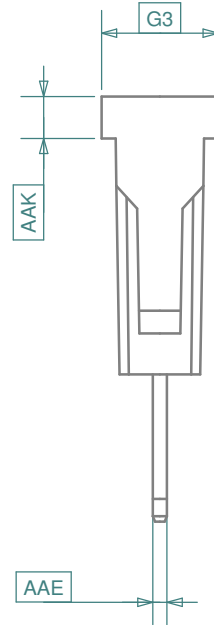


Fusing time SAE J-1284 [s]		
Load [%]	Minimum [s]	Maximum [s]
110 %	360,000	-
135 %	0.75	1,800
200 %	0.15	5
350 %	> 0.08	

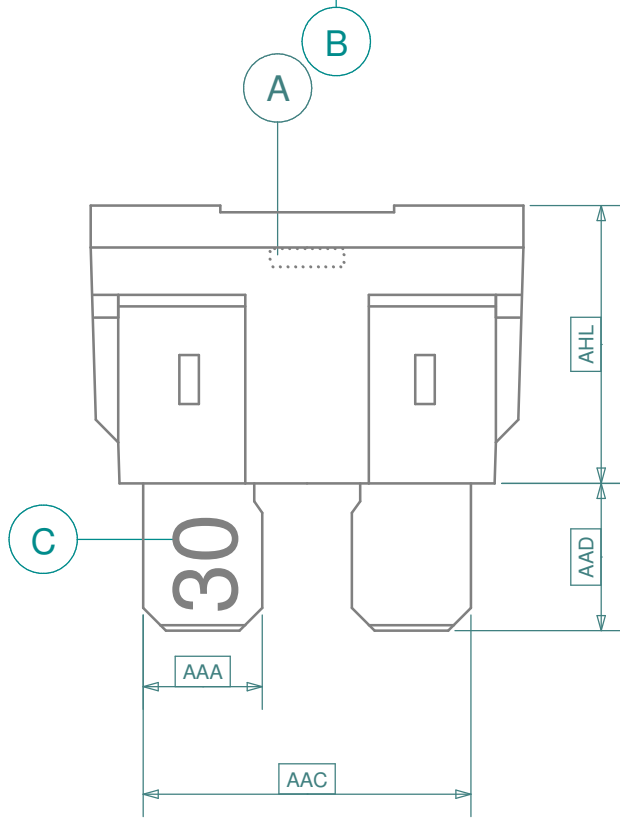

Notes	
A	LED / PCB placement
B	Amperage rating printed on fuse body
C	Amperage rating stamped

Rating [A]	Color	Volt [V]	iMaXX Reference
3	Violet	32	F1903
4	Pink	32	F1904
5	Tan	32	F1905
7.5	Brown	32	F1975
10	Red	32	F1910
15	Blue	32	F1915
20	Yellow	32	F1920
25	Natural	32	F1925
30	Green	32	F1930

Dimension [mm]		
	iMaXX	DIN 72581-3 (ref.)
AAD	6.42 ± 0.25	6.5 ± 0.5
AAE	0.65 ± 0.04	0.64 ± 0.04
AAA	5.2 ± 0.20	5.2 ± 0.2
AAC	14.48 ± 0.13	14.5 ± 0.3
H1	19.09 ± 0.21	max. 20
G3	5.12 ± 0.13	max. 5.5
AHL	max. 12.45	max. 15
AAK	1.8 ± 0.2	2.5 ± 1.5

Revisions			Date	Appr.	
	Date	Type	Drawn	12/08	AdH
a	08/11	rating print on top added	Checked	08/11	AdH
			Standards		
			Approved	08/11	AdH
			Scale	Not to scale	
			Projection	Tolerance ± 0.2 mm unless otherwise noted	
			Title		F1900 series, ShoBlo normOTO blade fuse
			Drawing type		schematic
			Drawing number		F1900 (LED) drawing 1
			Sheet		1 of 1
			Layers / Sheet		0 1 2 6 9 Sheet 01

