



Made in the Netherlands - DURABLE QUALITY

THE MOST
COMPACT & SMALLEST
DIESEL OR OIL-FIRED
CH BOILER IN THE WORLD

POST MARINE HEATING GIVES YOU A CALM AND WARM FEELING!

SMART-LINE HIGH-EFFICIENCY BOILER CH | COMBI | BOILER CONTROL



- High efficiency > 91%
- Clean consumption
LOW NO_x principle
- Multifunctional system
- Small footprint
- Low fuel consumption
- Easy operation
- Solid construction
- Low maintenance
- Low noise
- Good value and quality
(production & sales under one roof)

The Post Smart-Line is the most compact and smallest diesel or oil-fired CH boiler in the world, providing 7kW of heat. The Smart-Line is characterised by its compactness and high-power operation. It is multifunctional and can be configured to your requirements (e.g. the position of the CH connection can be at the rear or the right-hand side of the boiler, etc.), therefore the boiler will always meet your needs!

The Smart-Line is ideally suited to permanent habitation of a wide variety of small and large motor boats and sailing yachts, motor homes, holiday homes and horse vans and flower transport trucks. This is due to its compactness, fully automatic, silent and multifunctional performance.


The Smart-Line boiler can be combined with radiators, convectors, underfloor heating, climate-control/air-conditioning systems and hot-air systems, or a combination of different heating elements.

The Smart-Line therefore gives you a calm and warm feeling!

DIMENSIONS IN MM	A	B	C	D	E	F	G	H
Smart-Line CH	270	305	315	425	100	345	45	50
Smart-Line Combi / Boiler	270	305	315	425	100	345	45	50

Note: These are the dimensions of the boiler including heating pump and oil burner and not a footprint

TECHNICAL SPECIFICATIONS SMART-LINE		
Load (input)	kW	7,7
Capacity (output)	kW	7
Diameter exhaust	mm	50
Weight (CH / Boiler / Combi)	Kg	42 / 44 / 47
Liquid content boiler (water / glycol)	L	4,5
CH connection	mm	1" / 22mm
Drinking water connection	mm	15
Capacity hot water 40/80°C (Combi)	L / Min	7 / 3
Temperature Exhaust	°C	170 - 190
Efficiency	%	>91
Operating pressure	Bar	1.5 - 2.0
Maximum pressure (operation overflow valve)	Bar	3
Max. length chimney (horizontal)	Mtr	5
Max. length chimney (vertical)	Mtr	7
Fuel	Dieseloil / GTL	

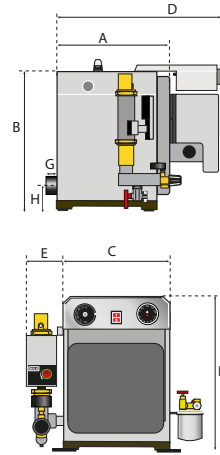

TECHNICAL SPECIFICATIONS LOW NOX OIL BURNER		
Pumping pressure	Bar	8 - 10
Diameter oil spray 60/80°S	°S	0.15 - 0.25
Start capability	W	295
Voltage	V	230
Power consumption based on 30% switch-on percentage (12 / 24V)	A	0.9 - 1.3
Operating power	W	175

All boilers are supplied with **LOW NOx** oil burner, pump, TOK80 oil filter, room thermostat, and clear instructions for installation and operation. We offer a 10-year warranty on the body of the boiler. The overall warranty is 2 years. This does not include any parts that may experience wear and tear, including the oil filter.

Dealer Post Marine Heating