

SVTIP-712C2


HD Network Camera




Features

- ❖ 1280x720@30fps Resolution
- ❖ Built-in power loss protection
- ❖ Perfect solutions for vehicles
- ❖ Day/Night(ICR), Digital Noise Filter, Super Wide Dynamic Range, Auto Wide Light Compensation
- ❖ IP66 water proof and dust proof(IP65 with audio)
- ❖ Three streams technology, phone monitoring
- ❖ PON(DC 12V)/POE(48V)
- ❖ Anti-vibration, vandal resistant

Dimension (Unit: mm)



Solution Reference

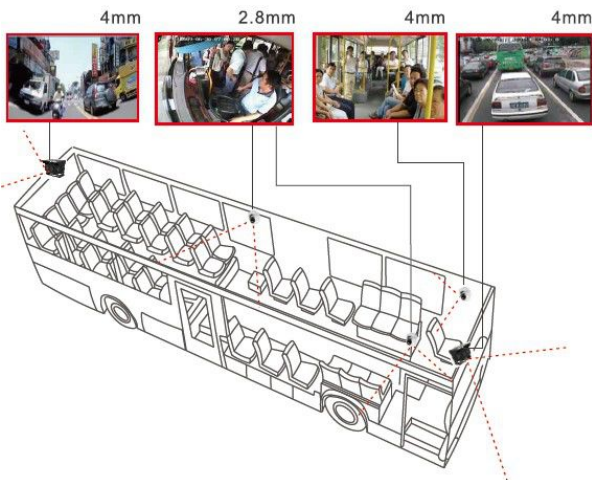

Specification

Series	IP-712C2	
Camera Parameters	Sensor	1/3" CMOS SONY IMX238
	Resolution	1280(H)x720(V)
	Signal System	50/60 Hz
	Minimum Illumination	0.05Lux(Color Illumination), F1.2
	Electronic Shutter	1/25 Second - 1/10000 Second
	Day/Night	IR-CUT
	Wide Dynamic Range	Digital Wide Dynamic Range
	Black-light Compensation	Support
	S/N	≥40db
	Wide Dynamic Range	≥80db
Optical Lens	Port	6-pin DJ M12(PON)/RJ45(POE)
	Aperture	Fixed aperture F1.8
	Lens	2.8mm, 4mm, 6mm, 8mm Optional
Audio/Video Encode	Video Compression	H.264
	Compression Output Rate	768Kbps-6144Kbps
	Image Resolution	Main Stream:720p @ 30fps, Network Sub Stream:VGA @ 25FPS Record Sub Stream:VGA @ 30FPS
	CBR/VBR	Support
	Built-in Mic	Support
	Audio Compression Standard	ADPCM、G.711A G.711U
Image	Maximum Image	1280x720
	Frame	30FPS
	Image Setting	Chroma, contrast, saturation and sharpness
	Network Protocol	HTTP, TCP , ARP, RTSP, UDP, RTCP, SMTP, DHCP, DNS, DDNS, PPPoE, IPV4, UPnP, NTP
	ONVIF	Support
	Client Terminal Preview	Built-in WEB server; Support IE browser
	Ports	Audio Input (Optional)
POE		Support
Storage		Client Terminal/ MDVR
Others	Temperature	-40℃-- +70℃
	Humidity	0% - 90%
	Power Supply	PON(DC12V)/POE(DC48V)
	Waterproof Class	IP66 (IP65 with audio)
	Power	<2w (Day) <3.5w (Night)
Dimension (mm)	110 (L)x110 (W)x60 (H)	