








Screw in Bulk
Φ4XL14

Mounting Hole

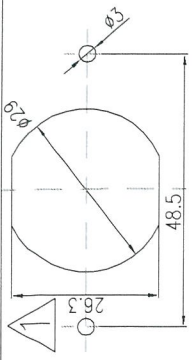

Rating	Input: 12V/24 DC Output: USB Socket - 5V 2.1A max.
Insulation Resistance	DC 500V 100MΩ Min.
Dielectric Strength	AC 1500V 1 minute
Operating Temperature	-0°C~60°C

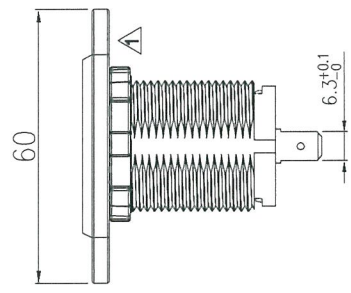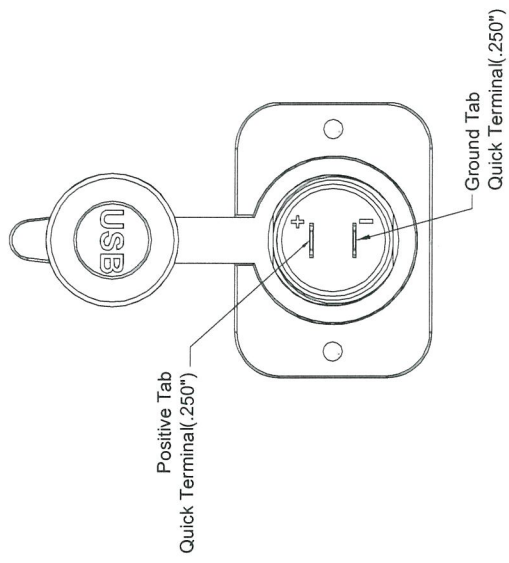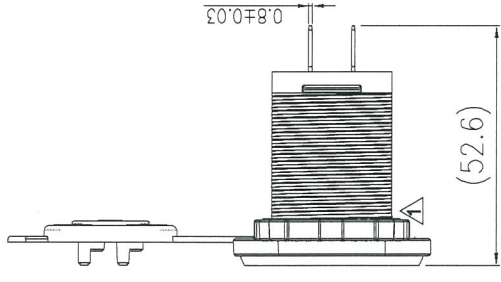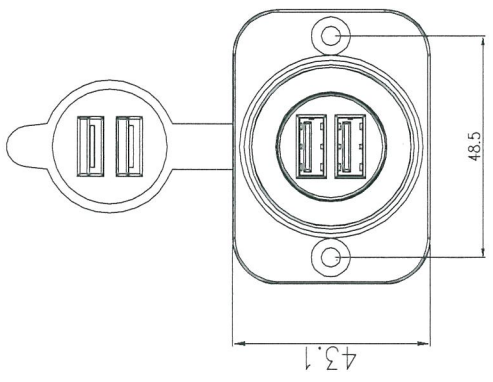

1. Tolerances ±0.3 Unless Otherwise Specified

03/06/15	方婷鳳	依客戶要求做修改,修改與錄目上同,增加裝配孔的高度標示->26.3	△
04/10/13	方婷鳳	依客戶要求增加螺帽(A13-122-2)	△
Date	Name	Description	No.

Drawn	Checked	Approved	SCI BOM No.	1251120	Model Name	Single Socket
方婷鳳			Customer No.		Model No.	A13-194BPS-BB3
03/06/15			Unit	mm		Rev. 2
Shin Chin Industrial Co., Ltd.						