


This document constitutes confidential and proprietary information of BlazeCut s.r.o. Any party accepting receipt of this document does so on the express understanding and agreement that it will neither reproduce, disclose to third parties or use this document for any purpose other than those expressly agreed to by BlazeCut s.r.o.

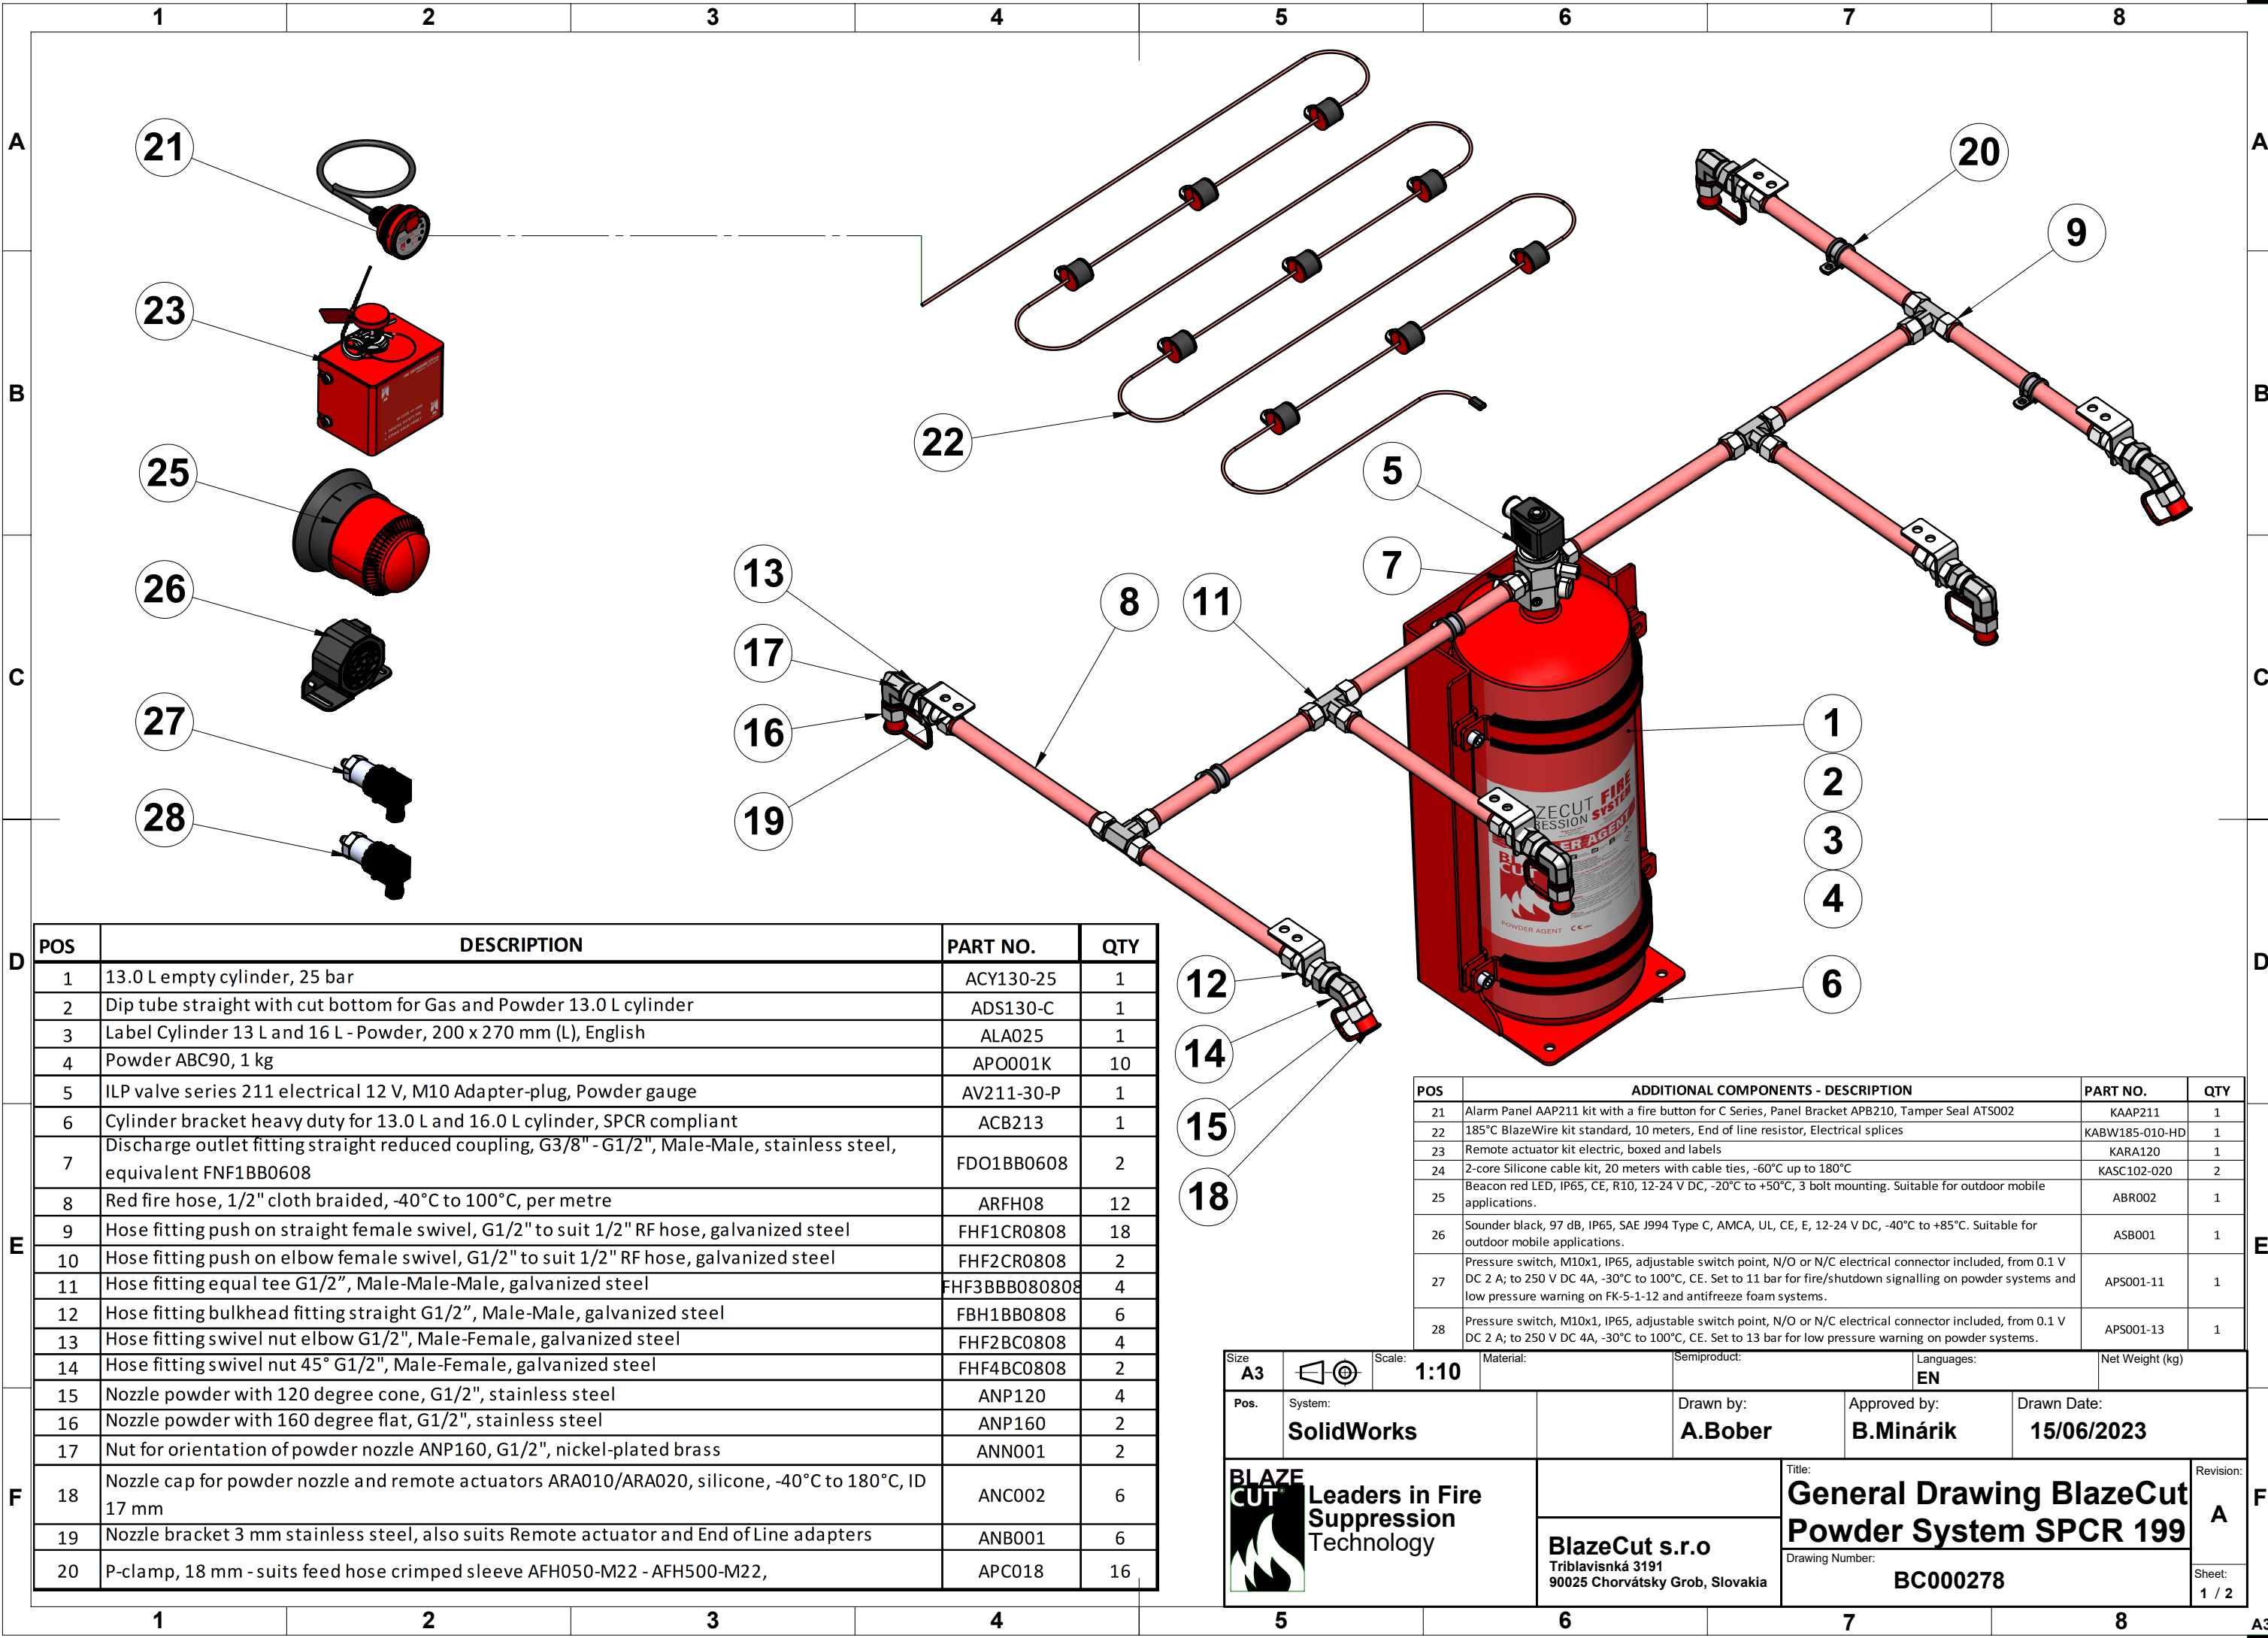

POS	DESCRIPTION	PART NO.	QTY
1	13.0 L empty cylinder, 25 bar	ACY130-25	1
2	Dip tube straight with cut bottom for Gas and Powder 13.0 L cylinder	ADS130-C	1
3	Label Cylinder 13 L and 16 L - Powder, 200 x 270 mm (L), English	ALA025	1
4	Powder ABC90, 1 kg	APO001K	10
5	ILP valve series 211 electrical 12 V, M10 Adapter-plug, Powder gauge	AV211-30-P	1
6	Cylinder bracket heavy duty for 13.0 L and 16.0 L cylinder, SPCR compliant	ACB213	1
7	Discharge outlet fitting straight reduced coupling, G3/8" - G1/2", Male-Male, stainless steel, equivalent FNF1BB0608	FDO1BB0608	2
8	Red fire hose, 1/2" cloth braided, -40°C to 100°C, per metre	ARFH08	12
9	Hose fitting push on straight female swivel, G1/2" to suit 1/2" RF hose, galvanized steel	FHF1CR0808	18
10	Hose fitting push on elbow female swivel, G1/2" to suit 1/2" RF hose, galvanized steel	FHF2CR0808	2
11	Hose fitting equal tee G1/2", Male-Male-Male, galvanized steel	FHF3BBB080808	4
12	Hose fitting bulkhead fitting straight G1/2", Male-Male, galvanized steel	FBH1BB0808	6
13	Hose fittings swivel nut elbow G1/2", Male-Female, galvanized steel	FHF2BC0808	4
14	Hose fitting swivel nut 45° G1/2", Male-Female, galvanized steel	FHF4BC0808	2
15	Nozzle powder with 120 degree cone, G1/2", stainless steel	ANP120	4
16	Nozzle powder with 160 degree flat, G1/2", stainless steel	ANP160	2
17	Nut for orientation of powder nozzle ANP160, G1/2", nickel-plated brass	ANN001	2
18	Nozzle cap for powder nozzle and remote actuators ARA010/ARA020, silicone, -40°C to 180°C, ID 17 mm	ANC002	6
19	Nozzle bracket 3 mm stainless steel, also suits Remote actuator and End of Line adapters	ANB001	6
20	P-clamp, 18 mm - suits feed hose crimped sleeve AFH050-M22 - AFH500-M22,	APC018	16

POS	ADDITIONAL COMPONENTS - DESCRIPTION	PART NO.	QTY
21	Alarm Panel AAP211 kit with a fire button for C Series, Panel Bracket APB210, Tamper Seal ATS002	KAAP211	1
22	185°C BlazeWire kit standard, 10 meters, End of line resistor, Electrical splices	KABW185-010-HD	1
23	Remote actuator kit electric, boxed and labels	KARA120	1
24	2-core Silicone cable kit, 20 meters with cable ties, -60°C up to 180°C	KASC102-020	2
25	Beacon red LED, IP65, CE, R10, 12-24 V DC, -20°C to +50°C, 3 bolt mounting. Suitable for outdoor mobile applications.	ABR002	1
26	Sounder black, 97 dB, IP65, SAE J994 Type C, AMCA, UL, CE, E, 12-24 V DC, -40°C to +85°C. Suitable for outdoor mobile applications.	ASB001	1
27	Pressure switch, M10x1, IP65, adjustable switch point, N/O or N/C electrical connector included, from 0.1 V DC 2 A; to 250 V DC 4A, -30°C to 100°C, CE. Set to 11 bar for fire/shutdown signalling on powder systems and low pressure warning on FK-5-1-12 and antifreeze foam systems.	APS001-11	1
28	Pressure switch, M10x1, IP65, adjustable switch point, N/O or N/C electrical connector included, from 0.1 V DC 2 A; to 250 V DC 4A, -30°C to 100°C, CE. Set to 13 bar for low pressure warning on powder systems.	APS001-13	1

Size: A3	Scale: 1:10	Material:	Semiproduct:	Languages: EN	Net Weight (kg)
Pos. System: SolidWorks	Drawn by: A.Bober	Approved by: B.Minárik	Drawn Date: 15/06/2023		
BLAZE CUT Leaders in Fire Suppression Technology		BlazeCut s.r.o Triblavinská 3191 90025 Chorvátsky Grob, Slovakia		Title: General Drawing BlazeCut Powder System SPCR 199 Drawing Number: BC000278	
				Revision: A	Sheet: 1 / 2