




## P90 Convector

# You like the performance – your passengers love the comfort

The MCC P90 is a twin pipe convector P90 with a generous heating capacity in a rugged and attractive design.

The P90 is based on a twin copper pipe system. This gives an efficient heat supply while taking up only the minimum of valuable space inside your bus or coach.

The Convector P90 comes with specially designed transition pieces and cover plates so you can build an entire system that looks good - wheel housings and doors are no longer a problem.

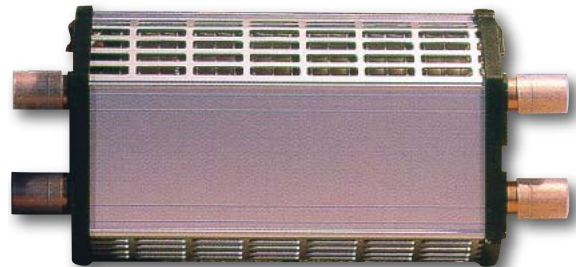


### Features

- Suitable for heating in buses, coaches, marine applications etc.
- Designed for vehicles with waterborne heating systems
- Noiseless and draught-free heating
- Maintenance-free
- Twin pipe for optimized heat output
- Robust and classic design

# P90 Convector

MCC Convector

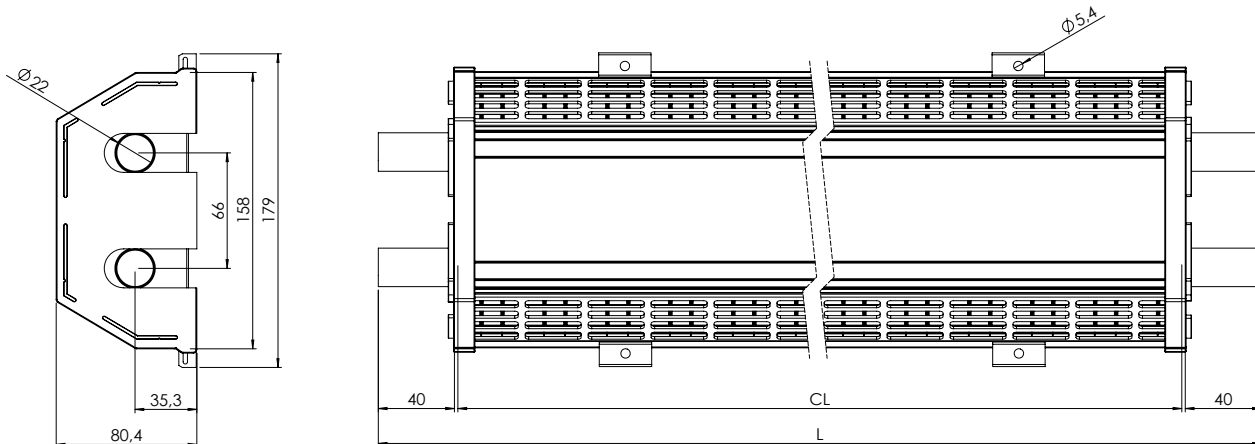

Dimensions in mm

## Technical Data

Output	Heat output 551 W/m @ Q60 (918 W/m @ Q100)
Piping	Copper Ø 22 mm
Weight	3.14 kg/m
Liquid capacity	0.68 l/m
Depth	81.5 mm
Height	165 mm
Lengths	625, 1250, 1875, 2500 mm
Special lengths	Up to 5000 mm, on request up to 5000 mm
Cover sections	Anodised aluminium
Installation method	Plastic clips which slide along convector
Accessories	Selection of end fittings, wide range of cover sections, end caps and brackets

\*) the Q value stands for the temperature difference between the water inlet temp and the air temp in the room where the heat exchanger is placed. For instance Q60 can stand for water inlet temp +80°C and air temp +20°C.



## Mobile Climate Control

Europe: Tel: +46 176 207 800  
 North America: Tel: +1-905-482-2750  
[www.mcc-hvac.com](http://www.mcc-hvac.com)