

WP-ShoreConnect

A waterproof shore connect system for yachts in a harsh marine environment



WP-ShoreConnect program

WP-ShoreConnect is your “link” for a comfortable and pleasant stay on board. When mooring in a marina the shore power is the source for your equipment on board and charge of your battery banks. WP-ShoreConnect is a waterproof boat inlet, mounted outside of your boat and the WP shore connect programs offer you everything you need for a high quality shore connection, with safety, security and performance at the top.

The technology is based on the international standard IEC60309 for outdoor connections like your boat inlet. With the WP-ShoreConnect cables and inlets you protect your crew for danger of electrical hazard. The CEE three sturdy poles ensure good contact with the phase, neutral and earth. First make your selection for the 16A or 32A connection by consider the maximum load for onboard power. Then choose the appropriate cable length and material for the power inlets. With the Power organization bag you can now store your cable in a nice and clean way. Well organized and ready to plug in for the next connection.

- 16A/250V, 25A/250V, 1phase, 3 wire
- Power LED indication
- Waterproof IP56
- Watertight moulded plug an connector
- Weatherproof storage bag
- Stainless steel and Polyamid Inlet



green energy solutions



green energy solutions



Shorecable Art. Nr.	50214701	50214702	50214711	nr. 50214712
Current Rating (A)	16A	16A	25A	25A
Voltage Rating (VAC)	250	250	250	250
Plug Type	Moulded IEC 60309 2p+E	Moulded IEC 60309 2p+E	Moulded IEC 60309 2p+E	Moulded IEC 60309 2p+E
Plug Color	Blue	Blue	Blue	Blue
Connector Type	Moulded IEC 60309 3-Pole	Moulded IEC 60309 3-Pole	Moulded IEC 60309 3-Pole	Moulded IEC 60309 3-Pole
Connector Color	Black / Yellow	Black / Yellow	Black / Yellow	Black / Yellow
LED light and protection cap on female connector	yes	yes	yes	yes
Cable Type	H07BQ-F 3x 2,50mm ²	H07BQ-F 3x 2,50mm ²	H07BQ-F 3x 4,00mm ²	H07BQ-F 3x 4,00mm ²
Cable Color	Yellow	Yellow	Yellow	Yellow
Cable Length (m)	15	25	15	25
Cable Size (mm ²)	2,50	2,50	4,00	4,00
Weight (kg)	2,66	4,3	4	7
CE Certified	yes	yes	yes	yes

Power Inlet Art. Nr.	50214680	50214684	50214685
Current Rating (A)	16	16	32
Voltage Rating (VAC)	250	250	250
Standard	IEC 60309, 2p+E	IEC 60309, 2p+E	IEC 60309, 2p+E
Cover	Glass filled PA6	Solid cast 316 Stainless Steel	Solid cast 316 Stainless Steel
Plug body	PA6	PA6	PA6
Pins	Brass, Nickel plated	Brass, Nickel plated	Brass, Nickel plated
Weight (kg)	0,23	0,34	0,65
Waterproof	IP 56	IP 56	IP 56
CE Certified	yes	yes	yes

Features:


- CE certified
- Waterproof IP 56 shore power cable and inlet
- Moulded plug and connector
- Power indication LED
- Protection cap on female connector
- Stainless steel or Polyamid inlet
- Many different adapter cords available, see our pricelist for details

WP-Combi Accessoires: Art. Nr. and Item

50214688	WP-Shore inlet plug 16A / 250V, 2pole-3wire for inlet 16A
50214689	WP-Shore inlet plug 32A / 250V, 2pole-3wire for inlet 32A
50214720	Adaptor Cord 16A / 250V schuko to CEE



Shore
250V / 50 Hz
1-phase, 2-pole, 3-wire

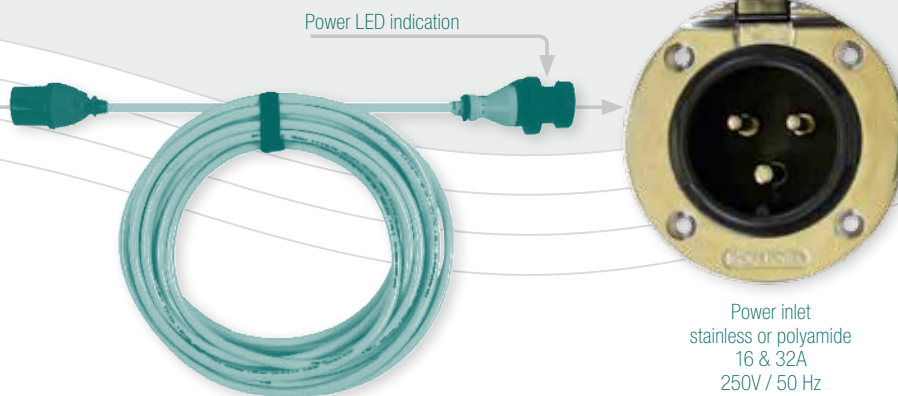

15 & 25 mtr.

Power inlet
stainless or polyamid
16 & 32A
250V / 50 Hz
1-phase, 2-pole, 3-wire

