



INVEST IN THE FUTURE



Made in France  
since 1964



# PLASMA cutting and gouging systems

**Plasma cutting is one of the most widely used processes in metallurgy and manufacturing. Its cutting speed and precision often give it the edge over flame cutting.**



## PLASMA TECHNOLOGY

Plasma cutting is a localised, fusion-cutting process in which the compressed jet of air pushes the metal to a melting temperature.

GYS systems are portable and easy to use, with even higher cutting speeds than flame cutting. Due to its versatility, plasma technology offers the possibility of cutting a wide variety of conductive materials up to a thickness of 57 mm.

### Main uses and applications:

- Cuts a variety of conductive materials including mild steel, carbon steel, stainless steel, aluminium, copper, brass and other ferrous materials.
- Straight / bevelled cut
- Automated cutting
- Highly accurate gouging
- Drilling
- Sheet metal marking

## OXYCUTTING technology

The equipment is simple and the user can be up and running quickly. However, this process is rather slow and only suitable for cutting carbon steel. Oxy-gas is not effective on other types of metal such as stainless steel or aluminium. What's more, the workpiece must be preheated before cutting, which further reduces productivity. Safety concerns arise from the use of acetylene, which is highly flammable and unstable (this combustible gas is most commonly used with flame cutting)

### Main uses and applications:

- Cutting steel for manufacturing or dismantling it.
- Heating parts for bending, straightening, heat treatment.
- Loosening jammed or rusted parts and bolts

## FOUR CUTTING ADVANTAGES



### Cutting quality

Plasma cuts produce less slag (burrs).



### Easy to use

No gas to adjust, no flame to control.



### Productivity

Cuts more parts, faster and with fewer secondary operations.



### Safety

No flammable gas required, uses only compressed air.



## MECHANISED CNC CUTTING

The term «CNC» refers to «Computer Numerical Control».

The torch's movement is controlled by a computer on the cutting table using a computer program.

### Three advantages of automated cutting:

- Consistent and reliable performance
- Increased productivity
- Optimised cutting quality

### More information?



There's more information in the brochure

PLASMA CUTTING		OXYCUTTING
Material(s)	<b>Conductive metals</b> (Steel, Aluminium, Copper, Brass)	Carbon steel only
Thickness	Up to <b>57 mm</b>	Up to 50 cm
Cutting quality	<b>Excellent cutting angularity</b> Small heat-affected area.	Good cutting angularity Large heat-affected area
Productivity	<b>Fast cutting speed</b> on all thicknesses.	Slow cutting speed. <i>(The preheating time increases the cutting time).</i>
Secondary operations	<b>Minimal slag</b>	Grinding and removal of surface oxidation almost always required.
Operating costs	Inexpensive (£)	Very expensive (£££)
Equipment cost	Expensive (££)	Inexpensive (£)
Portability	Yes	Yes
Gouging	Yes, very accurate	Yes
Safety	★★★	★

## MANUAL CUTTING



EASYCUT 25    EASYCUT K25    EASYCUT K35F    EASYCUT 30 FV    EASYCUT 40

	<b>25 A</b>	<b>25 A</b>	<b>35 A</b>	<b>30 A</b>	<b>40 A</b>
Mains voltage	230 V - 1~	230 V - 1~	230 V - 1~	110/230 V - 1~	230 V - 1~
Performance de coupe (mm)	Separation	8	8	15	15
	Recommended	Steel	6	10	10
	Drilling	-	-	-	-
Mechanised cutting		-	-	-	-
Internal compressor		-		-	-
Automatic air pressure control		-	-	-	-
Marking		-	-	-	-
Gouging		-	-	-	-
Protection rating	IP 21	IP 21S	IP 21	IP 21S	IP 21
Weight (kg)	7.8	15	30	11	8
Part no. with accessories*	065543	068063	031036	013858	029743

\*Power source + earth clamp  
+ hand-held torch

## MANUAL OR MECHANISED CUTTING



CUTTER 45 CT    CUTTER 70 CT    NEOCUT 105    NEOCUT 125

	<b>45 A</b>	<b>70 A</b>	<b>105 A</b>	<b>125 A</b>
Mains voltage	110 V 1~	230 V 1~	400 V - 3~	400 V - 3~
Performance de coupe (mm)	Separation	15	30	35
	Recommended	Steel	10	25
	Drilling	5	12	15
Mechanised cutting				
Internal compressor		-	-	-
Automatic air pressure control		-	-	
Marking		-	-	
Gouging		-		
Protection rating	IP 23	IP 23	IP 23	IP 23
Weight (kg)	15	22	33	36
Part no. with accessories*	062962	013841	063112	067448

\*Power source + earth clamp  
+ hand-held torch MT-70 or MT-125

## Glossary

Discover the technological features of our products as well as a brief explanation.



### Power Factor Correction (PFC)

PFC technology suppresses spikes and regulates the supply current. The electrical network is therefore better used, accepting supply voltages between 185 and 265 V and, therefore, favouring the use of extension cords or power supplies. Another important effect is that a power source equipped with this device consumes much less energy from the grid and allows it to be used on smaller circuit breakers (e.g. 16 A).



### Flexible Voltage

This technology extends the supply voltage range of the PFC from 85 to 265 V (185 to 265 V for a standard PFC). They can therefore be used on 110 V or 230 V electrical networks.



### Protect 400

Power sources equipped with this technology are able to withstand occasional or permanent voltage variations on the electrical network up to 400 V (lightning, engine-driven sets, load shedding, etc.).



### Anti-Dust

In this type of design, the ventilation corridor is isolated from the electronic parts, which greatly reduces contact with external dust.



### Mechanised cutting

Can be connected to a CNC cutting table.



### Internal air compressor

Eliminates the need for a nearby compressed air source.



### Auto AIR

Automatic management of air pressure and flow for optimal cutting.



### Open sheet mode

Ideal for cutting work on perforated sheets



### Marking mode

Ideal for surface marking and part identification.



### Gouging

Removal of metal in an efficient, precise and clean manner

## EASYCUT K25 & K35F

Built-in air compressor



MADE IN FRANCE



Compressor inside

### Specifications

	EASYCUT K25	EASYCUT K35F
Power Supply	230V 1 ph, 50/60 Hz	
Fuse	16 A	
Current range	10-25 A	10-35 A
Duty cycle @ 60%	15 A / 86 V	26 A / 90.4 V
EN 60974-1 (40°C) @ 100%	-	20 A / 88 V
Compressor (noise level)	60 -70 db	
Dimensions L x W x H	41 x 20 x 36 cm	28 x 52 x 46 cm
Weight	15 kg	30 kg
Original torch	TPT 25 (4 m)	MT 35K (4 m)

### Performance

	EASYCUT K25	EASYCUT K35F
Recommended cut (Clean cut)	Steel 6 mm Stainless steel / Alu 4 mm	10 mm 8 mm
Maximum cut (Separation)	Steel 8 mm Stainless steel / Alu 6 mm	15 mm 10 mm

### Options & Accessories

TPT 25 torch consumables kit	070721
MT 35K torch consumables kit	039964
Compass kit (Ø 10 >134 cm)	040205

### Ordering information

EASYCUT K25 + accessories TOPARCTPT 25 torch, 4 m + 2 m earth cable	068063
EASYCUT K35F + accessories TOPARC MT 35K torch, 4 m + 2 m earth cable	031036

## EASYCUT 30 FV

Designed for body shops



MADE IN FRANCE

### Specifications

Power Supply	230 V 1 ph, 50/60 Hz	110 V 1 ph, 50/60 Hz
Fuse	16 A	32 A
Current range	10-30 A	
Duty cycle @ 60%	23 A / 89.2 V	19 A / 87.6 V
EN 60974-1 (40°C) @ 100%	20 A / 88 V	15 A / 86 V
Recommended air flow rate	115 L/min	
Recommended air pressure	2.5 > 9 bar	
Dimensions L x W x H	45 x 28 x 20 cm	
Weight	11 kg	
Original torch	TPT 40 (4 m)	

### Performance

Recommended cut (Clean cut)	Steel 10 mm Stainless steel / Alu 8 mm
Maximum cut (Separation)	Steel 15 mm Stainless steel / Alu 10 mm

### Options & Accessories

TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
PLASMA 600 trolley	040298
Manual plasma torch TPT 40 - 4 m - with consumables	060753
Compass kit (Ø 10 >134 cm)	040205

### Ordering information

EASYCUT 30 FV + accessories TOPARCTPT 40 torch, 4 m + 2 m earth cable	013858
--	--------

## EASYCUT 25 & 40

Ultra compact



20 mm  
1 PHASE  
230 VOLTS

The ultra-compact EASYCUT 25 and 40 plasma cutters are ideal for easily cutting all types of metal up to 20 mm thick. With a power rating of up to 40 A, they excel at low-current precision cutting. Ideal for the workshop, they offer true portability without sacrificing cutting performance.

- Compact and lightweight, they provide excellent mobility.
- Easy-to-use control panel with a single potentiometer for adjusting the cutting intensity.
- No HF arc ignition to avoid electromagnetic interference.
- Manual air pressure adjustment (2.5 < 6.5 bar) with front bar graph.
- Equipped with a 4 m detachable torch with trigger safety device.

### Specifications

	EASYCUT 25	EASYCUT 40
Power Supply	230 V 1 ph, 50/60 Hz	
Fuse	16 A	16 A
Current range	10-25 A	10-40 A
Duty cycle EN 60974-1 (40°C)	@ 60% @ 100% 15 A / 86 V 10 A / 84 V	10 A / 84 V
Recommended air flow rate	115 L/min	
Recommended air pressure	2.5 > 6.5 bar	
Dimensions L x W x H	42 x 15 x 30 cm	
Weight	7.8 kg	8 kg
Original torch	TPT 25 (4 m)	TPT 40 (4 m)

### Performance

	EASYCUT 25	EASYCUT 40
Recommended cut (Clean cut)	Steel 6 mm	15 mm
	Stainless steel / Alu 4 mm	12 mm
Maximum cut (Separation)	Steel 8 mm	20 mm
	Stainless steel / Alu 6 mm	15 mm

### Options & Accessories

TPT 25 torch consumables kit	070721
TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
PLASMA 600 trolley	040298
Manual plasma torch TPT 40 - 4 m - with consumables	060753
Compass kit (Ø 10 > 134 cm)	040205

### Ordering information

EASYCUT 25 + accessories TOPARC TPT 25 torch, 4 m + 2 m earth cable	065543
EASYCUT 40 + accessories TOPARC TPT 40 torch, 4 m + 2 m earth cable	029743



## CUTTER 45 & 70 CT

Portable for industry



MADE IN FRANCE



The professional-grade plasma cutters, the CUTTER 45 CT (single phase) and 70 CT (three phase) can cut metal up to a thickness of 35 mm. The CNC interface and the automatic, AT-70, industrial torch enable a completely mechanised operation.

- Easy-to-use control panel with a single potentiometer for adjusting the cutting intensity.
- Three working modes: Cutting, trigger-lock cutting and cutting of perforated sheets.
- Pre-wired for use on automatic cutting table (optional CNC-1 analogue kit).
- No HF arc ignition to avoid electromagnetic interference.
- Manual air pressure adjustment (4.1 < 6.5 bar) with front bar graph.
- MT-70 premium torch designed to withstand impact and heat.




	CUTTER 45 CT*		CUTTER 70 CT
	230 V	110 V	400 V
Recommended cut (Clean cut)	Steel Stainless steel / Alu	25 mm 15 mm	10 mm 18 mm
Maximum cut (Separation)	Steel Stainless steel / Alu	30 mm 20 mm	15 mm 10 mm
Drilling	Steel Stainless steel / Alu	12 mm 6 mm	5 mm 3 mm
Gouging	Withdrawal rate	-	4.8 kg/h

\* with MT-70 torch

### Recommended cut

CUTTER 45 CT      CUTTER 70 CT

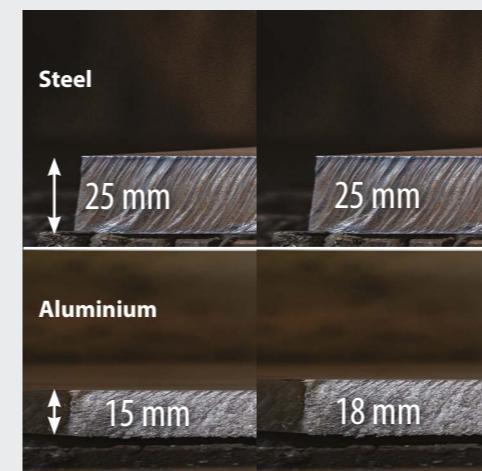

### Specifications

	CUTTER 45 CT		CUTTER 70 CT	
	Cutting	Gouging	Cutting	Gouging
Work mode				
Power Supply	230 V 1 ph, 50/60 Hz	110 V 1 ph, 50/60 Hz	400 V 3 ph, 50/60 Hz	
Fuse	16 A	32 A	16 A	
Current range	10-45 A	10-30 A	20-70 A	
Duty cycle EN 60974-1 (40°C)	@ 60% 41 A / 96.4 V	@ 100% 32 A / 92.8 V	21 A / 88.4 V 17 A / 86.8 V	70 A / 108 V 55 A / 102 V 45 A / 118 V
Recommended air flow rate	115 L/min	185 L/min	270 L/min	
Recommended air pressure			5 > 7 bar	
Dimensions L x W x H	48 x 37 x 23 cm		52 x 40 x 26 cm	
Weight	15 kg		22 kg	
Original torch	MT-70 (6 m) or TPT 40 (4 m)		MT-70 (6 m)	

### Options & Accessoires

MT-70 torch consumables kit	061613
TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
MT-70 manual plasma torch - 12 m - without consumables	037519
Automatic AT-70 plasma torch - 6 m - without consumables	037526
Automatic AT-70 plasma torch - 12 m - without consumables	037533
CNC-1 Analogue Kit for cutting table connection	039988
Filter with stainless steel grid (630 µm filtration)	046580
Cutting / chamfering / torch guidance kit	038653
TPT 40 Plasma Torch Compass Kit (Ø 10 > 134 cm)	040205
MT-70 Plasma Torch Compass Kit (Ø 40 > 82 cm)	037984

### Ordering information

CUTTER 45 CT + 2 m earth cable	014787
CUTTER 45 CT & accessories TOPARC TPT 40 torch, 4 m + 2 m earth cable	013629
CUTTER 70 CT + 4 m earth cable	013636
CUTTER 70 CT & accessories TOPARC MT-70 torch, 6 m + 4 m earth cable	013841

## NEOCUT 105 & 125

State-of-the-art technology



MADE IN FRANCE



With a high capacity for manual or mechanised cutting, NEOCUTs are the ideal solution in industrial environments. Its 100% duty cycle up to 125 A enables it to cut parts up to 57 mm thick. Equipped with automatic air pressure management, they offer optimal cutting quality throughout the life of the consumables.

- Automatic management of pressure and air flow according to the set current.
- Six working modes: cutting, trigger-lock cutting, gouging, triggerlock gouging, cutting of perforated sheets and marking.
- Marking mode, ideal for tracing and identifying parts.
- No HF arc ignition to avoid electromagnetic interference.
- Pre-wired for use on automatic cutting table (optional analogue/digital CNC kit).
- Monitored wear and tear of consumables (nozzle and electrode).
- Easy software updates via USB cable with no tools or disassembly required.
- OLED display and multilingual interface: easy to use, with all settings at the touch of a button.



Performance		NEOCUT 105	NEOCUT 125
Recommended cut (Clean cut)		Steel 35 mm	40 mm
		Stainless steel / Alu 30 mm	40 mm
Maximum cut (Separation)		Steel 50 mm	57 mm
		Stainless steel / Alu 40 mm	57 mm
Drilling		Steel 20 mm	25 mm
		Stainless steel / Alu 18 mm	25 mm
Gouging	Withdrawal rate	8 kg/h	12 kg/h


### Specifications

	NEOCUT 105	NEOCUT 125
Work mode	Cutting	Gouging
Power Supply		400 V - 3 ph, 50/60 Hz
Fuse	32 A	63 A
Current range	20-105 A	20-125 A
Duty cycle	@ 60% -	105 A / 142 V
EN 60974-1 (40°C)	@ 100% 105 A / 122 V	90 A / 136 V 125 A / 130 V 125 A / 150 V
Recommended air flow rate		305 L/min
Recommended air pressure		5 > 9 bar
Dimensions L x W x H		69 x 40 x 61 cm
Weight	33 kg	36 kg
Original torch		MT-125 (6 m)

### Options & Accessories

Consumables kit 45 / 65 / 85 A MT-125 torch	039537
Consumables kit 85 / 105 A MT-125 torch	064720
Consumables kit 105 / 125 A MT-125 torch	039544
Dehumidifier filter	039728
Skate trolley + bracket	037717
MT-125 manual plasma torch - without consumables	12 m - 038473 12 m - 039513
	15 m - 069787 20 m - 069794
Automatic AT-125 plasma torch without consumables	6 m - 038479 12 m - 039520
	15 m - 067479 12 m - 067486
Automatic AT-160 plasma torch without consumables	6 m - 069800 20 m - 069817
CNC-1 Analogue Kit for cutting table connection	039988
CNC-2 Digital kit for cutting table connections	064737
CNC-3 Digital Retrofit Kit	068957
Filter with stainless steel grid (630 µm filtration)	046580
Cutting / chamfering / torch guidance kit	038653

### Recommended cut

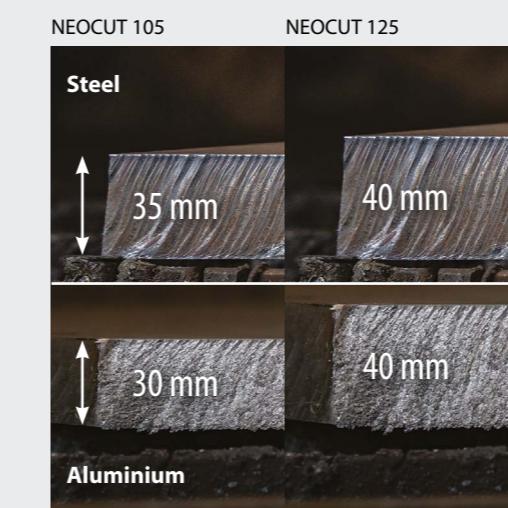

NEOCUT 105      NEOCUT 125



Reminder of the current mode  
Pressure measurement at the product's inlet  
Arc voltage measurement  
Current measurement  
Output pressure reminder  
Current setpoint

### Ordering information

NEOCUT 105	NEOCUT 125
NEOCUT + 4 m earth cable	063044 067431
NEOCUT + accessories TOPARC MT-125 torch, 6 m + 4 m earth cable	063112 067448

## Packs - EASYCUT K35F

031036	2 m, 10 mm <sup>2</sup>	MT-35K, 4 m	051331	x1	x3	x3	x1
Consumables kit 039964							

## Torches - EASYCUT

Model	Series	Angle	Duty factor	Length	Consumables	Part Number	Compatibility
	TPT 25	25 A (35%)	60%	15 A	4 m	including	068087
	TPT 40		100%	40 A	4 m	including	060753

## Consommables - EASYCUT

Torch model	Diffuser (x2)	Electrode (x10)	Tips (x10)	Nozzle (x4)	Consumables kit
MT 25K			040151	040182	MT 25K 039971
TPT 25	x1	040175	x3	040168	040182 TPT 25 070721
MT 35K			x3		040229 MT 35K 039964
TPT 40					040236 TPT 40 039957

## Packs - CUTTER CT / NEOCUT

Connections	Connections	Earth cable	Manual torch	Automatic torch	CNC kit	Skate trolley	Diffuser	Electrode	Tips	Nozzle	Ohmic	Deflector

### CUTTER 45 CT

	1 062962	■	2 m, 10 mm <sup>2</sup>	MT-70, 6 m 037502				x1	x1	x1	x1	x1
	2 062979	■		MT-70, 12 m 037519				x1	x3	x3	x1	x1
	3 062986	■		AT-70, 12 m 037533	Analog 039988			x1	x5	x5	x1 (Ohmic) 037618	x1 037649

### CUTTER 70 CT

	1 013841	■	4 m, 10 mm <sup>2</sup>	MT-70, 6 m 037502				x1	x1	x1	x1	x1
	2 014589	■		MT-70, 6 m 037502				x1	x3	x3	x1	x1
	3 014596	■		MT-70, 12 m 037519				x1	x3	x3	x1	x1
	4 014619	■		AT-70, 12 m 037533	Analog 039988			x1	x5	x5	x1 (Ohmic) 037618	x1 037649

### NEOCUT 105

	1 063112	■	4 m, 16 mm <sup>2</sup>	MT-125, 6 m 039506				x1	x1	x1	x1	x1
	2 065871	■		MT-125, 6 m 039506				x2	x3	x6	x3	x3
	3 065888	■		MT-125, 12 m 039513				x2	x3	x6	x3	x3
	4 065995	■		AT-125, 12 m 039520 125A 60%	Analog 039988			x1	x5	x5	x1 (Ohmic) 039445	x1 039308
	5 068186	■		AT-125, 12 m 039520 125A 60%	Digital 064737			x1	x5	x5	x1 (Ohmic) 039445	x1 039308


### NEOCUT 125

	1 067448	■	4 m, 25 mm <sup>2</sup>	MT-125, 6 m 039506				x1	x1	x1	x1	x1
	2 068193	■		MT-125, 6 m 039506				x1	x3	x6	x1	x1
	3 068209	■		MT-125, 12 m 039513				x1	x3	x6	x1	x1
	4 068216	■		AT-125, 12 m 039520 125A 60%	Analog 039988			x1	x5	x5	x1 (Ohmic) 039445	x1 039308
	5 068223	■		AT-125, 12 m 039520 125A 60%	Digital 064737			x1	x5	x5	x1 (Ohmic) 039445	x1 039308
	6 073463	■		AT-160, 12 m 067486 125A 100%	Analog 039988			x1	x5	x5	x1 (Ohmic) 067585	x1 067608
	7 073470	■		AT-160, 12 m 067486 125A 100%	Digital 064737			x1	x5	x5	x1 (Ohmic) 067585	x1 067608

## CUTTER CT / NEOCUT torch

Model	Series	Angle	Duty factor 60%	Duty factor 100%	Length	Consumables	Part Number	Compatibility	
	MT-70	70 A (50%)	50 A	6 m	12 m	not including	037502	CUTTER 45 CT	
							037519	CUTTER 70 CT	
	MT-125	125 A	105 A	6 m	12 m		039506	NEOCUT 105	
							039513	NEOCUT 125	

## EASYFIT torch

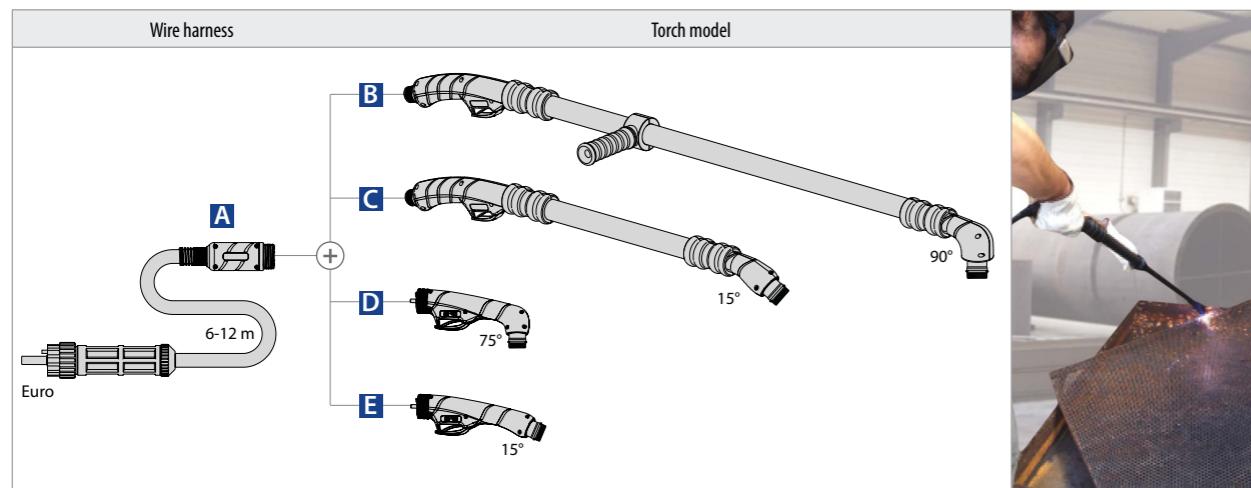

Series	Model	Angle	Duty factor 60%	Duty factor 100%	Length	Consumables	Part Number	Compatibility
<b>A</b>	MT-70 MT-125	-	-	-	6 m	not including	074668	CUTTER 45 CT CUTTER 70 CT NEOCUT 105 NEOCUT 125
					12 m		074675	NEOCUT 105 NEOCUT 125
<b>B</b>	MT-125	90°	125 A	105 A	-	130 cm	074644	NEOCUT 105 NEOCUT 125
		15°					074651	
<b>C</b>	MT-125	90°	125 A	105 A	-	80 cm	074620	NEOCUT 105 NEOCUT 125
		15°					074637	
<b>D</b>	MT-70 MT-125	70 A (50%)	50 A	-	-	-	074583	CUTTER 45 CT CUTTER 70 CT
							074606	NEOCUT 105 NEOCUT 125
<b>E</b>	MT-70 MT-125	70 A (50%)	50 A	-	-	-	074590	CUTTER 45 CT CUTTER 70 CT
							074613	NEOCUT 105 NEOCUT 125

## CUTTER CT / NEOCUT consumables

Torch model	Caliber	Diffuser (x1)	Electrode (x5)	Tips (x5)	Nozzle (x1)	Cutting shield (x1)	Consumables kit
<b>MT-70</b>	20-50 A	x1	037557	x3 037564 short 067196 long	x3 037571 short 037588 short 067189 long	x1 037601	x1 037625 037625 short 067216 long
	70 A	x1	037557	x3 037564 short	x3 037588 short	x1 037601	x1 037625 short 067216 long
	Precision cut 45 A	039131	039155	039315	039216	039322	45/65/85 A 039537
	45 A	x1	039131	x3 039162	x1 039216	x1 039230	85/105 A 064720
	65 A	x1	039131	x3 039179	x1 039216	x1 039230	105/125 A 039544
	85 A	x1	039155	039186	x1 039223	x1 039247	
	105 A	x1	039148	x3 039193	x1 039223	x1 039247	
	125 A	x1	039148	x3 039209	x1 039223	x1 039247	
	<b>Caliber</b>		<b>Diffuser (x1)</b>	<b>Electrode (x5)</b>	<b>Tips (x5)</b>	<b>Nozzle (x1)</b>	<b>Gouging shield (x1)</b>
	MT-70	70 A	037557	037564	037595	037601	037632
<b>MT-125</b>	65-85 A	039131	039155	039261	039216	039254	
	105 A	039148		039278	039223		
	125 A	039148		039285	039223		

## Difficult-access consumables

Torch model	Caliber	Diffuser (x1)	Electrode (x3)	Nozzle (x1)	Ring (x3)	Tips (x5)	Cutting shield (x1)	a b
<b>MT-70</b>	20-45 A	037557	074682	074859	074897	074767	074910	76 mm 122 mm
	70 A	037557	074682	074859	074897	074774		
	20-45 A	039131	074699	074866	074897	074767	074910	82 mm 131 mm
	70 A	039131	074699	074866	074897	074774	074910	
	100 A	039148	074699	074866	074897	074781		
	70 A	037557	074682	074859	074897	074798	074927	76 mm 122 mm
	70 A	039131	074699	074866	074897	074798	074927	82 mm 131 mm
	100 A	039148	074699	074866	074897	074804		
	<b>Caliber</b>		<b>Diffuser (x1)</b>	<b>Electrode (x3)</b>	<b>Nozzle (x1)</b>	<b>Ring (x3)</b>	<b>Tips (x5)</b>	<b>Cutting shield (x1)</b>
	MT-125	70 A	039131	074699	074866	074897	074927	

## Flat cutting consumables

Torch model	Caliber	Diffuser (x1)	Electrode (x5)	Nozzle (x1)	Tips (x5)	Retaining ring (x2)	
<b>MT-70</b>	40-70 A	074736	074705	074873	074811	074903	
	40-70 A	074743	074712	074880	074828		
	80-125 A	074750	039155		074835		

## Automatic torch

Model	Series	Duty factor		Length		Ø	Consumables	Part Number	Compatibility	
	AT-70	70 A (50%)	50 A	6 m	127 mm	Ø 35 mm	not including	071865	CUTTER 45 CT CUTTER 70 CT	
				6 m	127 mm			037526		
		125 A	105 A	12 m		Ø 35 mm		037533		
				6 m				038479		
				12 m				039520	NEOCUT 105 NEOCUT 125	
				15 m				069787		
				20 m				069794		
				6 m		Ø 44.5 mm		067479		
				12 m				067486		
				15 m				069800		
				20 m				069817		

## Consumables

Torch model		Caliber	Diffuser (x1)	Electrode (x5)	Tips (x5)	Nozzle tip (x1)	Ohmic nozzle tip (x1)	Shield cap (x1)	
AT-70	Cutting	20-50 A	037557	037564	037571	037601	or	037618	037649
		70 A			037588				
AT-125	Cutting	Precision cut 45 A	039131	039155	039315	039216	or	039339	037496
		45 A			039162				
		65 A			039179				
		85 A			039186				
		105 A			039193	039223	or	039445	039308
		125 A			039209				
		Precision cut 45 A	067509	037493	037516	-	067578	067592	
		45 A			067523				
		65 A			067530				
		85 A			067547				
		105-125 A			067554				

## Accessories

	<b>Dehumidifier filter</b> 039728 Filter and cartridge 039735 Cartridges (x4)
	<b>Dust filter</b> 046580 CUTTER 70 CT - NEOCUT 105/125
	<b>RC-PLASMA</b> Remote control ON/OFF switch for mechanised plasma torch  069596 CUTTER 45/70 CT - NEOCUT 105/125

## Cutting guides

	<b>Caliper kit #1</b> 040205 compatible with TPT 25 / TPT 40 / MT 25K / MT 35K / MT 45 torches 040199 Guide carriage
	<b>Caliper kit #2</b> 037984 compatible with MT-70 / MT-125 torches 037977 Guide carriage
	<b>Cutting / chamfering / guiding kit</b> 038653 compatible with MT-70 / MT-125 torches

## Trolleys

040977 EASYCUT K35F	073593 NEOCUT 105/125	037717 NEOCUT 105/125	040298 EASYCUT K25/K35F EASYCUT 30FV - 25/40 CUTTER 45 CT	051331 EASYCUT K25/K35F EASYCUT 30FV - 25/40 CUTTER 45 CT	039568 EASYCUT K25/K35F CUTTER 45 CT NEOCUT 105/125

## CNC kits

<b>Analogue CNC-1</b> 039988 CUTTER 45/70 CT NEOCUT 105/125	<b>Digital CNC-2</b> 064737 NEOCUT 105/125	<b>Retrofitted digital CNC-3</b> 068957 NEOCUT 105/125

To learn more

INVEST IN THE  
FUTURE

[www.gys.fr](http://www.gys.fr)



GYS 2022 catalogue  
**Welding & Cutting**

**GYS FRANCE**

1, rue de la Croix des Landes  
53941 SAINT-BERTHEVIN - France  
Tél. : 02 43 01 23 60

[www.gys.fr](http://www.gys.fr) | [contact@gys.fr](mailto:contact@gys.fr)



Made in France  
since 1964