

POWERSUPPLIES

DC to AC inverter, 2000W pure sine wave



- Pure sine wave output
- High peak power output
- Over load, polarity and short circuit protection
- CE marking including LVD
- Equipped with remote function input

Technical data:

Input:


Input voltage: 12VDC or 24VDC
 Input voltage tolerance: 10-15VDC or 20-30VDC
 Current consumption at no load: 1.5A at 12V and 1.0A at 24V

Output:

Output voltage: 230VAC/50Hz pure sine wave
 Regulation: +/-5%
 Output power nominal: 2000W continuous
 Output power peak: 4000W for 100mS
 Efficiency: >85%
 Protection: Short circuit, Overload and polarity protection (fuse)
 Temperature protection: Shutdown at 60°C +/-10°C
 High battery voltage: Shutdown at 15V, +/-0.5V or 32V, +/- 1.0V
 Alarm at 10.5V, +/-0.5V or 21V, +/- 1.0V
 Low battery voltage: Shutdown at 10V, +/-0.5V or 20V, +/- 1.0V

Fuse: 40A@12V (6 pcs) / 20A@24V (6 pcs)
 Temperature range: -15°C-+50°C
 Cooling: Fan inside
 Size: 420x289x100 mm
 Weight: 6500g
 Safety and EMC: CE / LVD acc. to EN60950

Mechanical drawing:

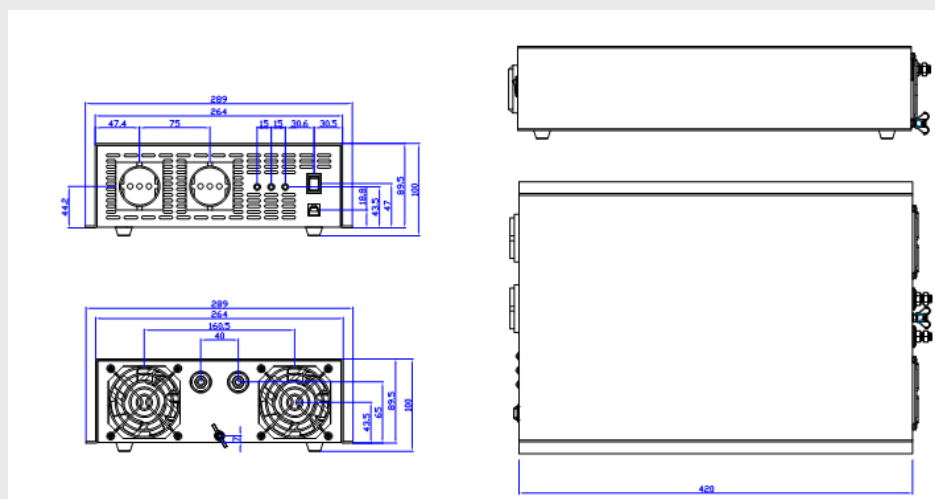

Ordering information:

Type	Input voltage	Power	Output voltage
C 10421029 / 12-230	12VDC	2000W	230VAC
C 10421030 / 24-230	24VDC	2000W	230VAC
PC 10421026	Remote with 6m cable		